





MIXOMAT mini

Laboratory blenders for 0,5 to 2 litres drums

Housing

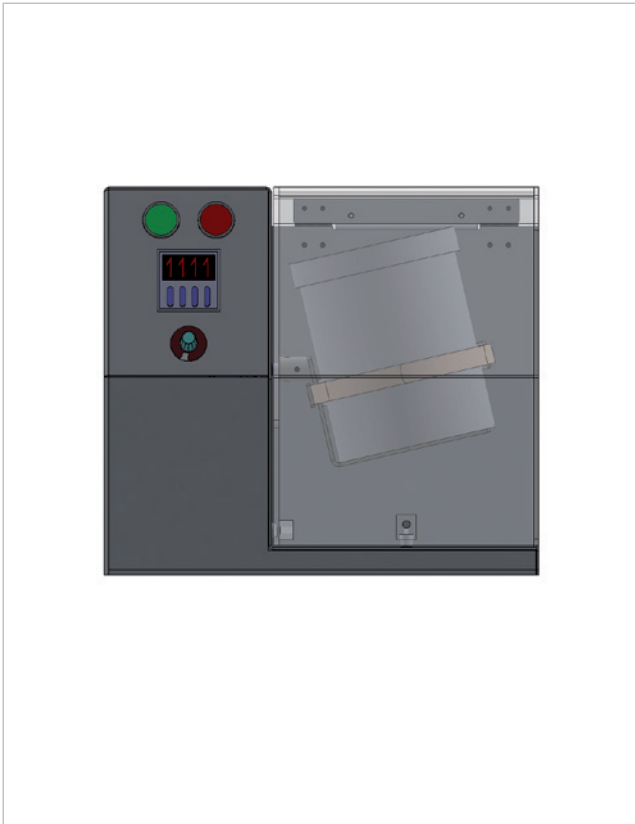


MIXOMAT mini

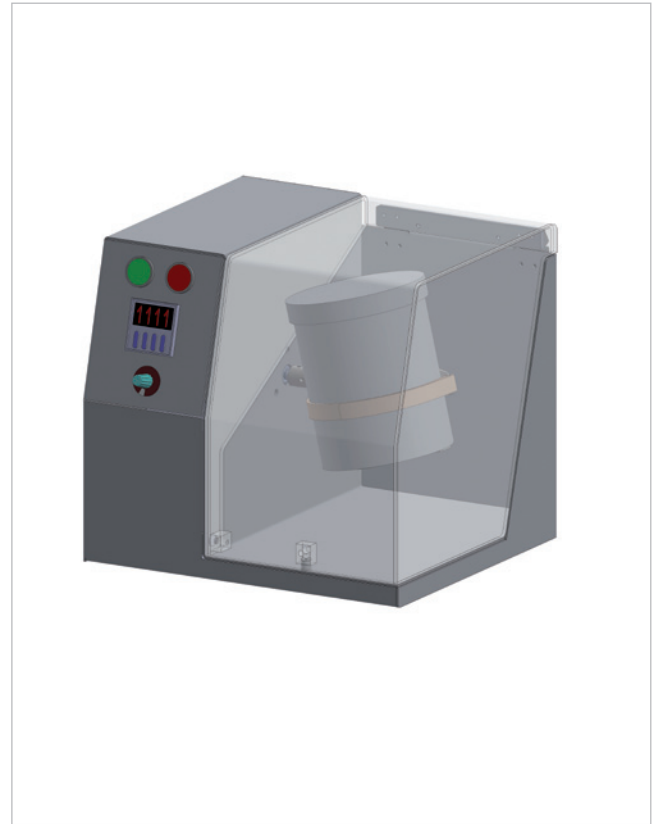

Executions

- ✓ Robust, compact and elegant blender housing with integrated Plexiglas protection hood
- ✓ Safe-guarding by means of a contactless proximity switch, i.e. the blending process can only be started when the hood is closed
- ✓ Blender housing and container holder completely in stainless steel 1.4301
- ✓ Polished surfaces
- ✓ Suitable for 0.5 to 2 litres containers (adjustable container holder with adaptable rubber belt)
- ✓ Control unit with digital timer
- ✓ Two lines display for set and remaining blending time, adjustable from 1 s to 999 h, speed regulation from 0 to 47 rpm
- ✓ Powerful DC geared-motor (torque: 2 Nm)
- ✓ Max. load capacity: 2000 g
- ✓ Max. bulk weight: 2 kg/l
- ✓ Mains connection: 230 V single-phase
- ✓ Optionally with CH or EU mains plug
- ✓ Supplied with a white half-litre, one litre or two litres fully cylindrical PP container with screw cap
- ✓ No narrowing at the top of the winding

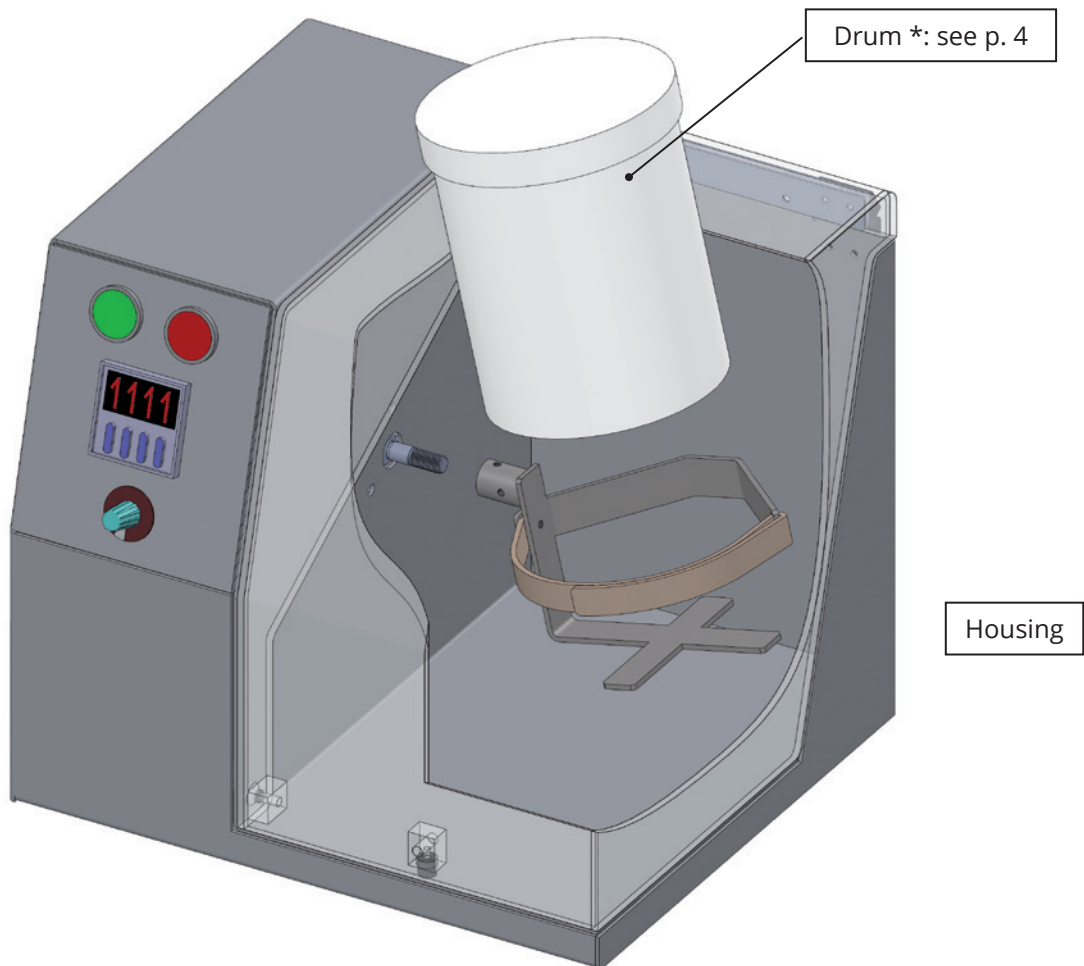

MIXOMAT mini

Containers

The following FUCHS containers are available as a standard:

Plastic containers



Executions:

✓ 0.5-2 l PP, white

0.5 to 2 l plastic container

Container sizes for MIXOMAT mini

V [l]	Material	D [mm]	H [mm]	Art. number Container
0,5	PP	90	87	M-M-0035
1	PP	110	122	M-M-0037
2	PP	130	167	M-M-0039



Issue Date: 2018-03

FUCHS Maschinen AG
Englisberg 17
1763 Granges-Paccot (Switzerland)
Phone: +41 26 510 10 00
info@fuchsag.com
www.fuchsag.com