


Dimensions Drum blender MI XOMAT B Double-sided execution

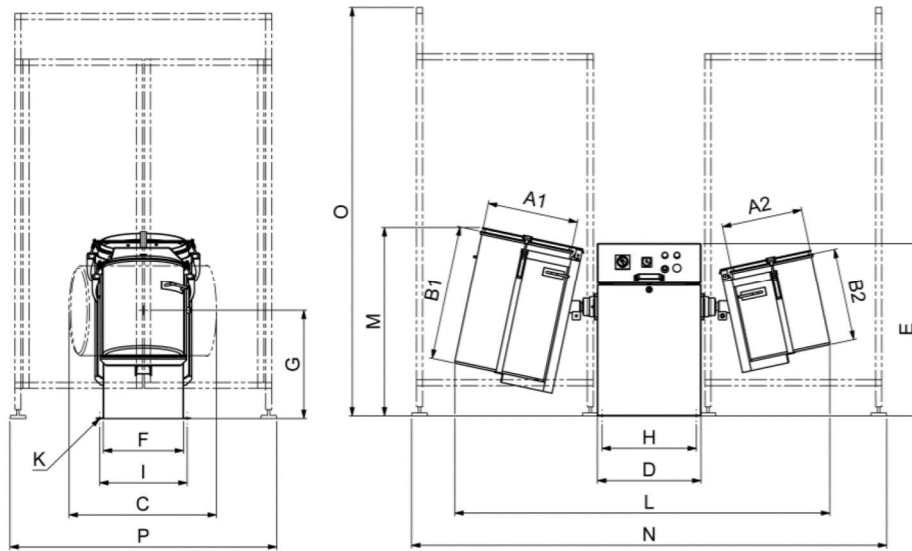

Explanations:

- Dimensions in mm
- The number indicated in the type stands for the volume of the container
- Drum holders are provided in different executions. They may as well be adapted to customers drums
- Drum blender and safety guard may be customized according to customers requirements

Type	A1ø	B1	A2ø	B2	C	D	E	F	G	H	I	Kø	L	M	N	O	P
B 30/30*	300	520	300	520	647	515	856	400	540	470	436	15	1575	867	2325	2030	1330
B 50/50	400	455	400	455	610	515	856	400	540	470	436	15	1799	825	2325	2030	1330
B 60/30*	400	610	300	520	768	515	856	400	540	470	436	15	1665	910	2325	2030	1330
B 60/60*	400	610	400	610	768	515	856	400	540	470	436	15	1755	910	2325	2030	1330
B 90/30*	475	650	300	520	794	515	856	400	540	470	436	15	1752	926	2325	2030	1330
B 90/60*	475	650	400	610	794	515	856	400	540	470	436	15	1842	926	2325	2030	1330
B 90/90*	475	650	475	650	794	515	856	400	540	470	436	15	1929	926	2325	2030	1330
B 100/50	450	665	400	455	825	515	856	400	540	470	436	15	1869	937	2325	2030	1330
B 100/100	450	665	450	665	825	515	856	400	540	470	436	15	1939	937	2325	2030	1330
B 120/30*	500	810	300	520	957	515	856	400	540	470	436	15	1777	1005	2325	2030	1330
B 120/60*	500	810	400	610	957	515	856	400	540	470	436	15	1867	1005	2325	2030	1330
B 120/90*	500	810	475	650	957	515	856	400	540	470	436	15	1954	1005	2325	2030	1330
B 120/120*	500	810	500	810	957	515	856	400	540	470	436	15	1979	1005	2325	2030	1330
B 150/50	560	665	400	455	902	627	1118	550	667	540	610	15	2149	1086	2493	2030	1880
B 150/100	560	665	450	665	902	627	1118	550	667	540	610	15	2219	1086	2493	2030	1880
B 150/150	560	665	560	665	902	627	1118	550	667	540	610	15	2387	1086	2493	2030	1880
B 200/50	560	870	400	455	1085	627	1118	550	667	540	610	15	2173	1177	2493	2030	1880
B 200/100	560	870	450	665	1085	627	1118	550	667	540	610	15	2243	1177	2493	2030	1880
B 200/150	560	870	560	665	1085	627	1118	550	667	540	610	15	2411	1177	2493	2030	1880
B 200/200	560	870	560	870	1085	627	1118	550	667	540	610	15	2435	1177	2493	2030	1880
B 220/30*	580	1030	300	520	1230	627	1118	550	667	540	610	15	2039	1250	2493	2030	1880
B 220/60*	580	1030	400	610	1230	627	1118	550	667	540	610	15	2129	1250	2493	2030	1880
B 220/90*	580	1030	475	650	1230	627	1118	550	667	540	610	15	2216	1250	2493	2030	1880
B 220/120*	580	1030	500	810	1230	627	1118	550	667	540	610	15	2241	1250	2493	2030	1880
B 220/220*	580	1030	580	1030	1230	627	1118	550	667	540	610	15	2391	1250	2493	2030	1880
B 300/50	770	799	400	455	1016	750	1278	748	850	628	728	18	2545	1312	2510	2030	2280
B 300/100	770	799	450	665	1016	750	1278	748	850	628	728	18	2616	1312	2510	2030	2280
B 300/150	770	799	560	665	1016	750	1278	748	850	628	728	18	2783	1312	2510	2030	2280
B 300/200	770	799	560	870	1016	750	1278	748	850	628	728	18	2807	1312	2510	2030	2280
B 300/300	770	799	770	799	1016	750	1278	748	850	628	728	18	3056	1312	2510	2030	2280
B 400/50	770	997	400	455	1209	750	1278	748	850	628	728	18	2571	1409	2510	2030	2280
B 400/100	770	997	450	665	1209	750	1278	748	850	628	728	18	2642	1409	2510	2030	2280
B 400/150	770	997	560	665	1209	750	1278	748	850	628	728	18	2809	1409	2510	2030	2280
B 400/200	770	997	560	870	1209	750	1278	748	850	628	728	18	2833	1409	2510	2030	2280
B 400/300	770	997	770	799	1209	750	1278	748	850	628	728	18	3082	1409	2510	2030	2280
B 400/400	770	997	770	997	1209	750	1278	748	850	628	728	18	3108	1409	2510	2030	2280